

Specification Sheet



Pump Data

Model *	SLP-90-8	
Liquid	Seawater, Brackish water, Fresh Water	
Pump Operating Ambient Temp	33 - 158 °F	0.6 - 70.0 °C
Maximum Storage Temp	185 °F	85.0 °C
Pump Operating Flow Range **	198 - 594 gpm	45.5 - 136.6m ³ /h
Maximum Rated Flange Pressure	270 psi	19 bar
Maximum Solid Size	0.125 in	3.175 mm
Head (nominal)	268 Ft	81.7 M
Pump Weight (with base)	266 lbs	121 kg

* Subject to international patent applications

** Range includes several sizes

Hydraulic Design

Pump	Single Stage, end suction, centrifugal, closed-coupled
------	---

Performance

Peak Efficiency **	Up to 80%
--------------------	-----------

** Range includes several sizes

Motor Data

Manufacturer	WEG or equivalent					
Motor Type	NEMA					
Ambient Temperature	-4 - 104 °F	-20 - 40 °C	-4 - 104 °F	-20 - 40 °C	-4 - 104 °F	-20 - 40 °C
Power Rating	50 HP-460/60/3	40 HP-380/50/3	30 HP-460/60/3	25 HP-380/50/3	20 HP-460/60/3	15 HP-380/50/3
Service Factor	1.25	1.00	1.25	1.00	1.25	1.00
Efficiency	93.00%	91.00%	91.70%	89.50%	91.00%	88.50%
Full Load Amps	56.1	69.4	33.8	42.0	23.2	28.6
Frame	326 JM	326 JM	286 JM	286 JM	256 JM	256 JM
Enclosure	TEFC	TEFC	TEFC	TEFC	TEFC	TEFC
Electric Power	37 kW	37 kW	22 kW	22 kW	15 kW	15 kW
Motor Weight	590 lbs [268 kg]	590 lbs [268 kg]	412 lbs [187 kg]	412 lbs [187 kg]	288 lbs [131 kg]	288 lbs [131 kg]

Materials

Casing	Zeron SS (ASTM A995-13 6A)
Bearings	Non-metallic
Motor Adapter	316 SS
Baseplate	Carbon Steel - Painted (A36)
Mechanical Seal Faces	SiC/ Graphite
O-Rings	Buna N [®]
Impeller	Zeron SS (ASTM A995-13 6A)
Flanges	Zeron SS (ASTM A995-13 6A)
Crating/Packaging	Export-Wood

Packaging/ Crating

Protective Covers	Standard	
Export Crating	Standard	
Additional Shipping Options	Available per customer request	
Pump Package Weight	856 lbs	389 kg

Fittings

Pipe Joints	Flange: ASME/ANSI B16.5 Class 150 Feed Inlet 4" Feed Outlet 3"
-------------	--


Lubrication

Cooling	Product fluid
Lubrication	Product fluid

Testing and Inspection

Hydrostatic Test *	Standard
Mechanical Run Test *	Standard
Factory Duty Point Hydraulic Performance Test *	Optional
Material Certificates	Optional

* General Code Groups, Associations, Laboratories, and Approval Bodies include the American Society for Testing and Materials (ASTM), the International Organization for Standardization (ISO), and the NSF International.

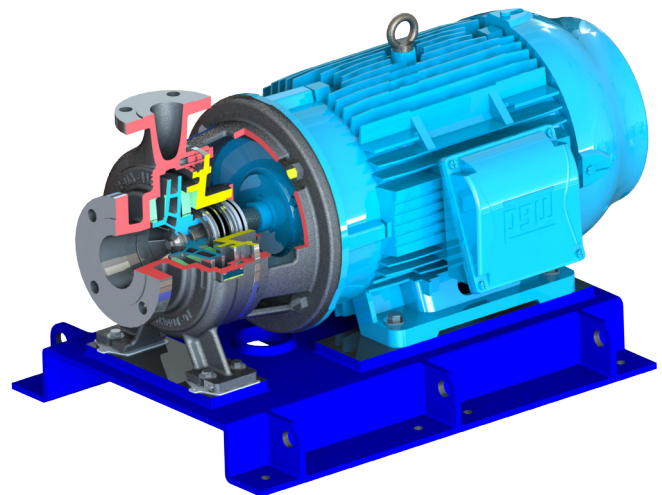

NOTE: All numeric values are based on performance norms. Specific performance data is included with each individual unit. FEDCO reserves the right to make specification changes at any time without prior notice. Please contact your FEDCO representative for information. email: sales@fedco-usa.com